


5	6	7	8
REV. B	ECN NO. LEN-880370~373	DATE 2008/03/06	SIGN Gao Ling
			DESCRIPTION Add Cross


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

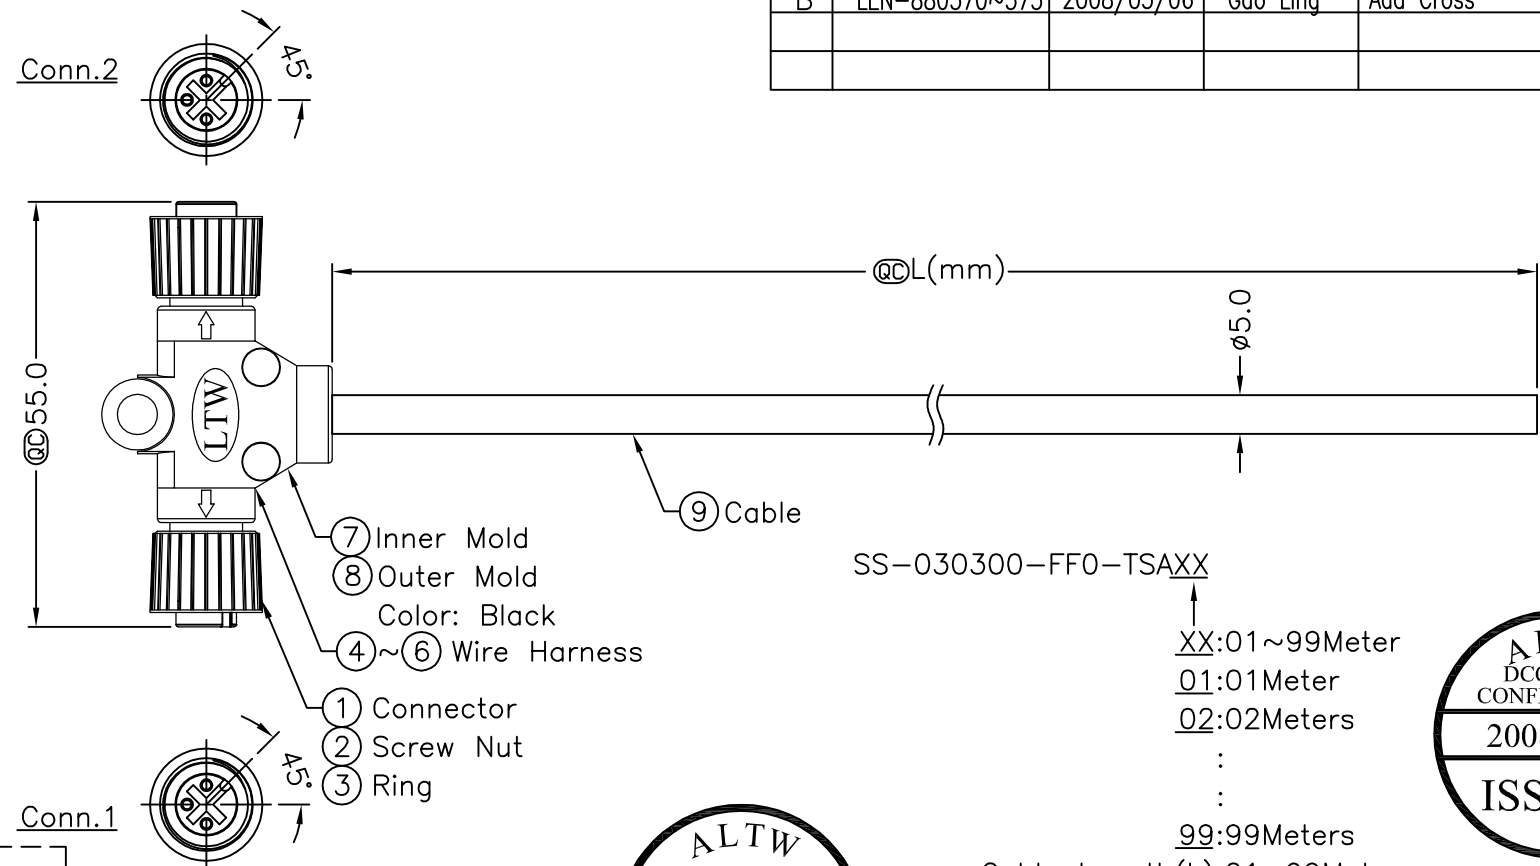


SS-030300-FF0-TSAXX

- XX:01~99Meter
- 01:01Meter
- 02:02Meters
- ⋮
- 99:99Meters

Cable Length(L):01~99Meters



- Note:
- * QC Important Dimension.
 - * Waterproof Rate: IP68
 - * Housing: Black, PU
 - * Female Pin: Copper Alloy, Gold Plated
 - * Wire Harness: UL1007 24AWG, 3Pcs.
 - * Cable: UL2464 22AWG*3C+Talc Black, PVC Jacket UV Resistant OD=5.0mm
 - * Cable Length Tolerance: 1M~10M \pm 5%mm, 11M~99 \pm 500mm.



Conn.1 & Conn.2
Pin Assignments
Front View

4	Black 黑	4
3	Blue 藍	3
1	Brown 棕	1
Conn.1	Wire Color	Conn.2
Pin Out		

UNIT:mm		TITLE M12 Conn T Cable Screw FF Conn FF Pin	Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO	DRAWN BY Gao Ling	DATE 2008/03/06
TOLERANCE ± 0.5 mm	SCALE Free	SHEET 1 OF 1			DWG NO SS-030300-FF0-TSAXX	CHECKED BY Ling	DATE 2008/03/25
REV. B	SIZE A4	QC : Inspection Item		CUSTOMER ALTW	APPROVED BY Luke	DATE 2008/04/29	8 FMW0702-01-01A2