



LIGHT BAR SERIES

OF-LBS3528W



ATTENTION
OBSERVE PRECAUTIONS


FOR HANDLING
ELECTROSTATIC
DISCHARGE
SENSITIVE
DEVICES



Features

- 485MMX8MM SMD LIGHT BAR □30-LED□
- PRINTED CIRCUIT BOARD THICKNESS □1.6MM
- WORKING VOLTAGE □12V DC.
- WORKING CURRENT: 200MA.
- LED VIEW ANGLE(2θ1/2):120°.
- PACKAGE: 1PCS / PVC TUBE.

Package Dimensions

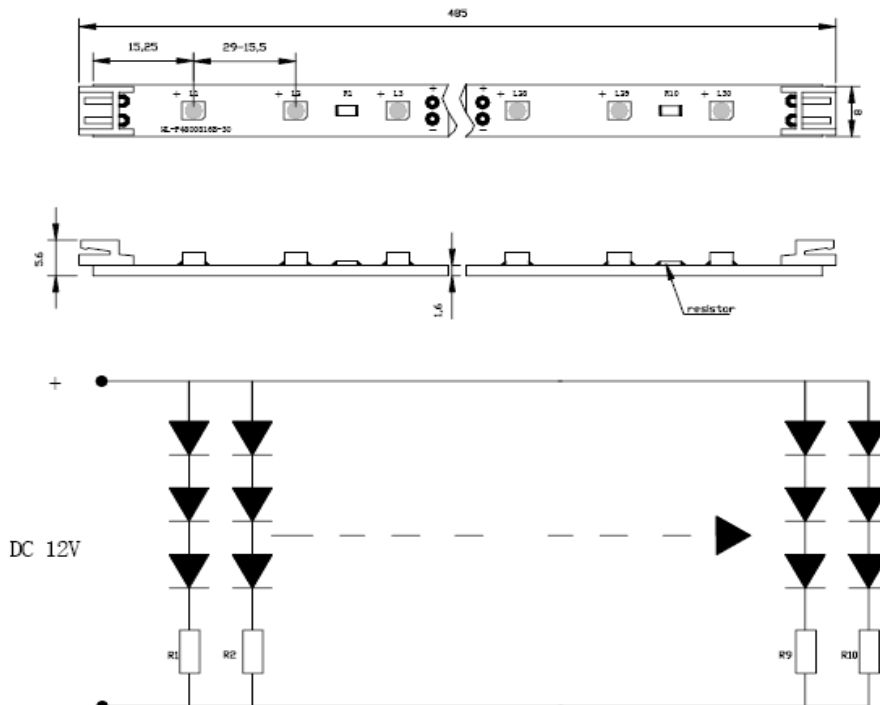

Notes:

1. All dimension units are millimeters.
2. All dimension tolerance is ± 1 mm unless otherwise noted.



LIGHT BAR SERIES

Absolute Maximum Rating at TA=25°C

Parameter	Symbol	Absolute Maximum Rating	Unit
Forward Current	IF	200	mA
Power Dissipation	PD	2,4	W
Electrostatic discharge	ESD	800	V
Operating Temperature	Tstg	-25 ~ +60	°C
Storage Temperature	Tstg	- 40 ~ + 80	°C

Electrical / Optical Characteristics at TA=25°C

Parameter	Symbol	Condition	Min	Typ	Unit
Forward Voltage DC	VF	IF=200mA		12	V
Dominant Wavelength	λ_D	IF=200mA			nm
Luminous flux	ϕ_V	IF=200mA		60	lm
Recommend Forward Current	IF(rec)	IF=200mA		200	mA

Notes:Tolerance of measurement of luminous intensity \pm 15%.

Package means



APPLICATIONS

- EDGE-LIGHTING OF TRANSPARENT OR DIFFUSED MATERIALS.
- PATH&CONTOUR MARKING.
- EMERGENCY/RESCUE SIGNS.
- TO COUPLE LIGHT INTO TRANSPARENT OR DIFFUSED GLASS .